


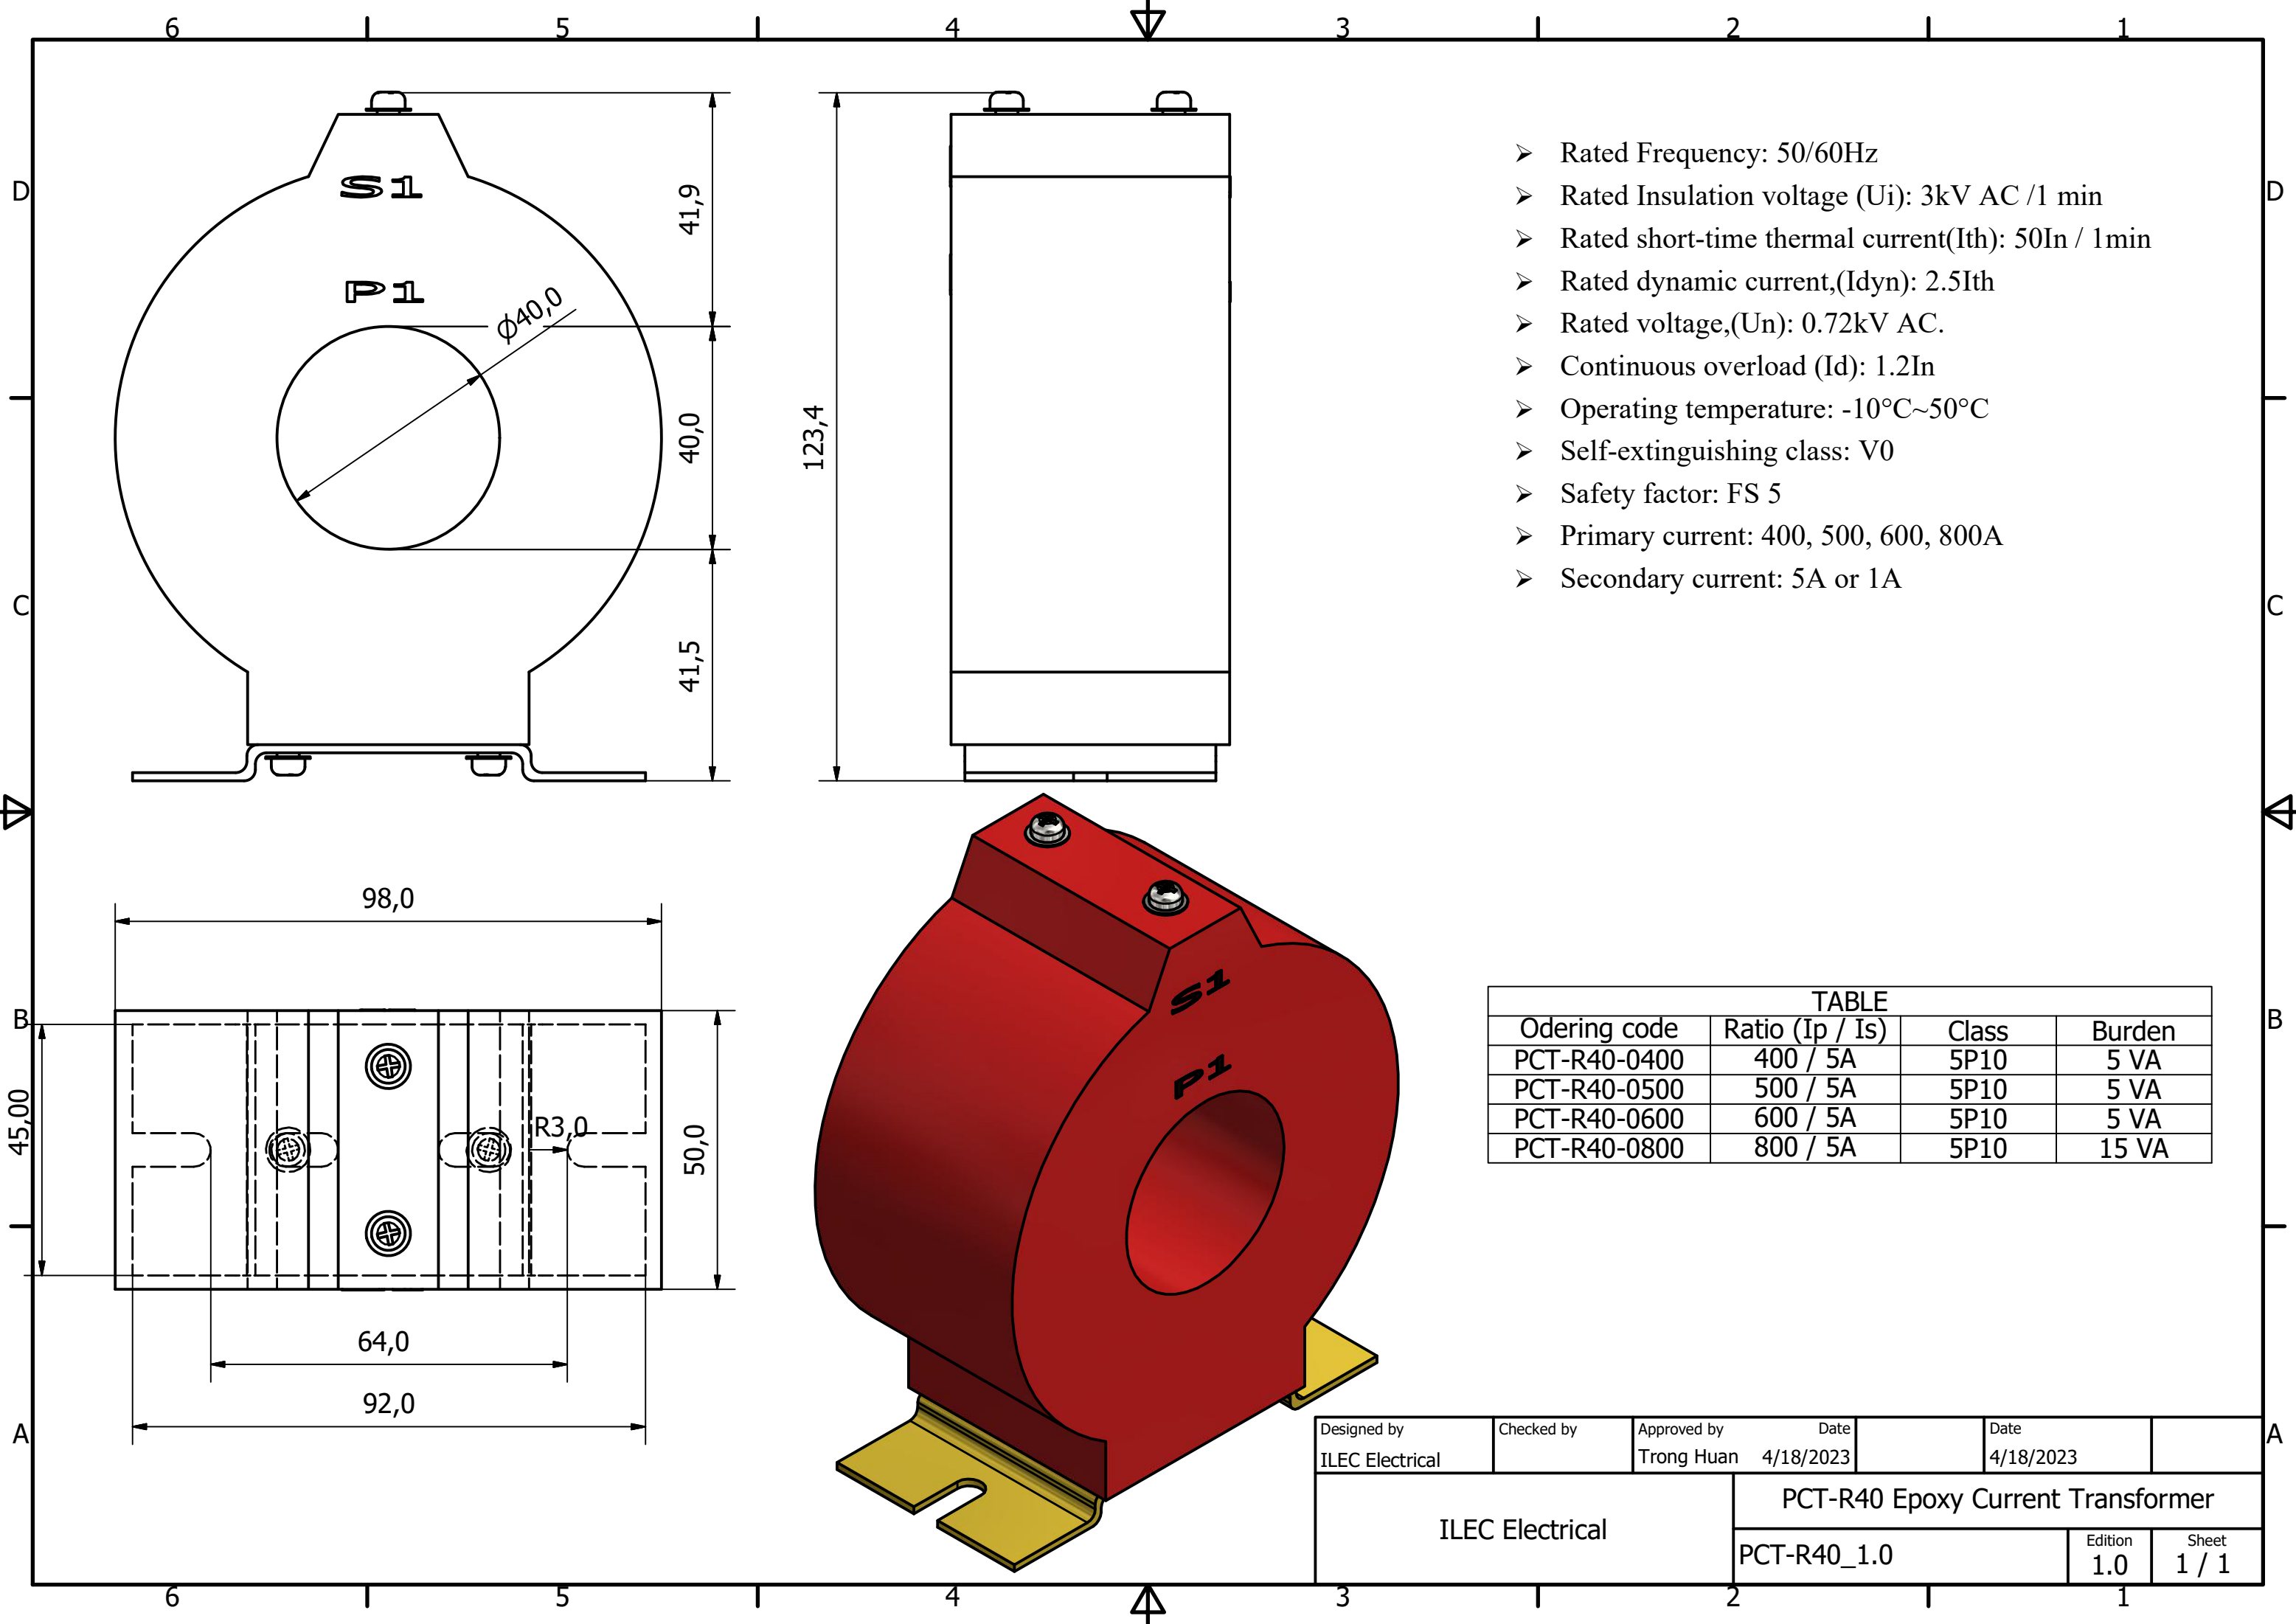

- Rated Frequency: 50/60Hz
- Rated Insulation voltage (Ui): 3kV AC /1 min
- Rated short-time thermal current(Ith): 50In / 1min
- Rated dynamic current,(Idyn): 2.5Ith
- Rated voltage,(Un): 0.72kV AC.
- Continuous overload (Id): 1.2In
- Operating temperature: -10°C~50°C
- Self-extinguishing class: V0
- Safety factor: FS 5
- Primary current: 400, 500, 600, 800A
- Secondary current: 5A or 1A

TABLE			
Odering code	Ratio (Ip / Is)	Class	Burden
PCT-R40-0400	400 / 5A	5P10	5 VA
PCT-R40-0500	500 / 5A	5P10	5 VA
PCT-R40-0600	600 / 5A	5P10	5 VA
PCT-R40-0800	800 / 5A	5P10	15 VA

Designed by ILEC Electrical	Checked by	Approved by Trong Huan	Date 4/18/2023	Date 4/18/2023	
ILEC Electrical			PCT-R40 Epoxy Current Transformer		
			PCT-R40_1.0	Edition 1.0	Sheet 1 / 1